


TATA TISCON Fe 600

THE JOY OF BUILDING A STRONGER TOMORROW



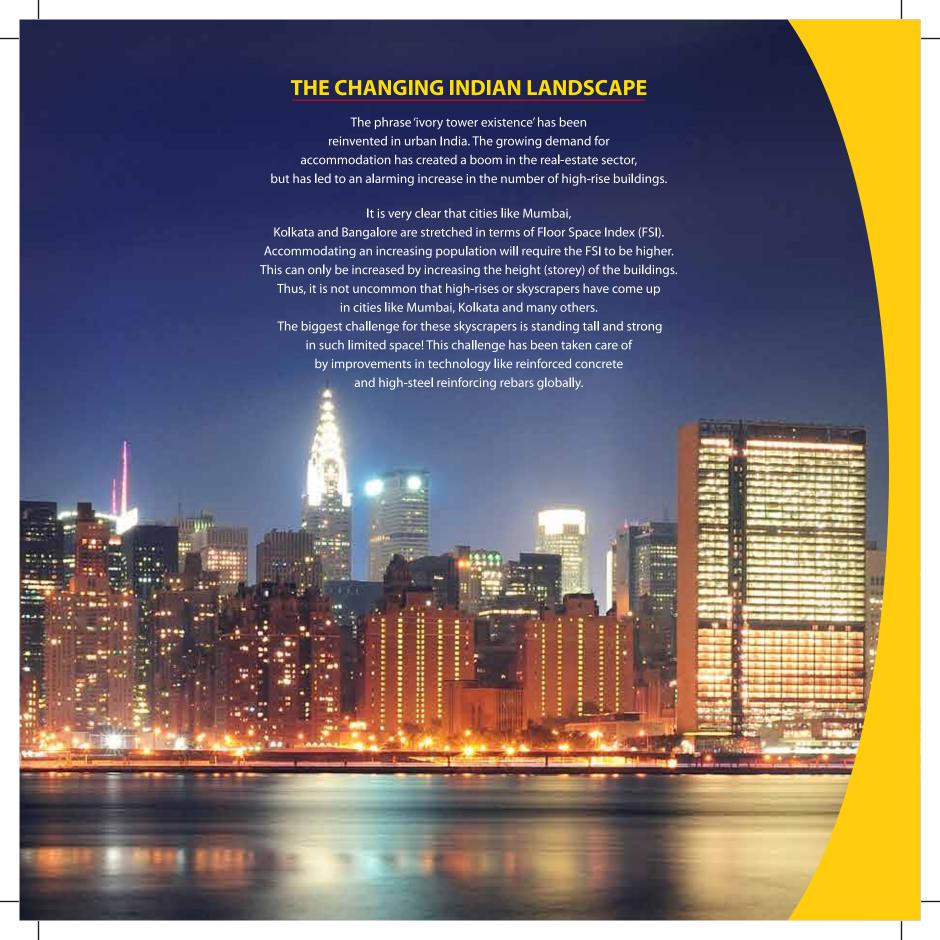

SUPER STRENGTH HAS A NEW NAME – TATA TISCON Fe600

Reinforced concrete, these days, is synonymous with construction globally. Be it the world's highest building, biggest metro viaduct or longest bridge, they are all built using reinforced concrete. Improvement in concrete technology has resulted in higher grade of concrete (up to M80) thereby making the structural member leaner. Constrained by land availability and enabled by enhancement in design capabilities, engineers are opting for leaner structures with higher load carrying capabilities.

Such improvements in technology have been coherent with this requirement. However, with high-strength carbon-alloyed steel reinforcing bars, the biggest challenge has been managing the compatible ductility together with enhanced strength. TATA Tiscon Fe600 rebars are envisaged to provide the best of both worlds. These reinforcement bars are suitably micro-alloyed to achieve better ductility along with higher strength. TATA Tiscon Fe600 can be used in buildings, bridges, marine facilities and many others to create leaner structures with lesser steel congestion improving construction quality and saving cost.



NOW?

- Due to the reduction in area of steel, Fe600 can be used with column reinforcement in large infrastructural projects
- Costs drop due to the reduction in steel used when combined with conventional concrete, making Fe600 extremely advantageous

TATA TISCON Fe600 – MECHANICAL & CHEMICAL PROPERTIES

TATA Tiscon's unique method of manufacturing creates a combination of strength and ductility that far exceeds the minimum limit specified in IS:1786. TATA Tiscon Fe600 offers 20% higher

Yield Strength (YS) than the Fe500 grade rebar with similar ductility. While YS denotes the 'design' strength of rebar, UTS/YS ratio and percent elongation are important properties in a rebar as it reflects ductility characteristics. TATA Tiscon Fe600 rebars are suitably alloyed and micro-alloyed resulting in excellent ductility along with superior strength. The other undesirable impurities (like sulphur and phosphorus) that impair the overall longevity of rebars when used inside structures are also maintained at lower levels than specified limits.

Quality check of the Fe600 rebars at the laboratories



The test has been validated at TATA Steel test facilities as National Test House, Kolkato (BIS recognized labs)

CHEMICAL PROPERTIES

CHEMICAL FROM EATHER							
	Carbon % (max)	Sulphur % (max)	Phosphorus % (max)	Sulphur & Phosphorus % (max)			
Tiscon Fe500D	0.25	0.040	0.040	0.075			
Tiscon Fe600	0.30	0.040	0.040	0.075			

MECHANICAL PROPERTIES


	YS in MPa (min)	UTS in MPa (min)	Elongation % (mim)	UTS/YS Ratio (min)
Tiscon Fe500D	500	580	16	1.12
Tiscon Fe600	600	720	18	1.12

(Please note, it conforms to stringent specifications of Fe500D grade as per IS:1786)



• Fe600 can be used with Fe500D without any change in the ductile behaviour of the structure because they have the same elongation and UTS/YS ratio

AVAILABILITY

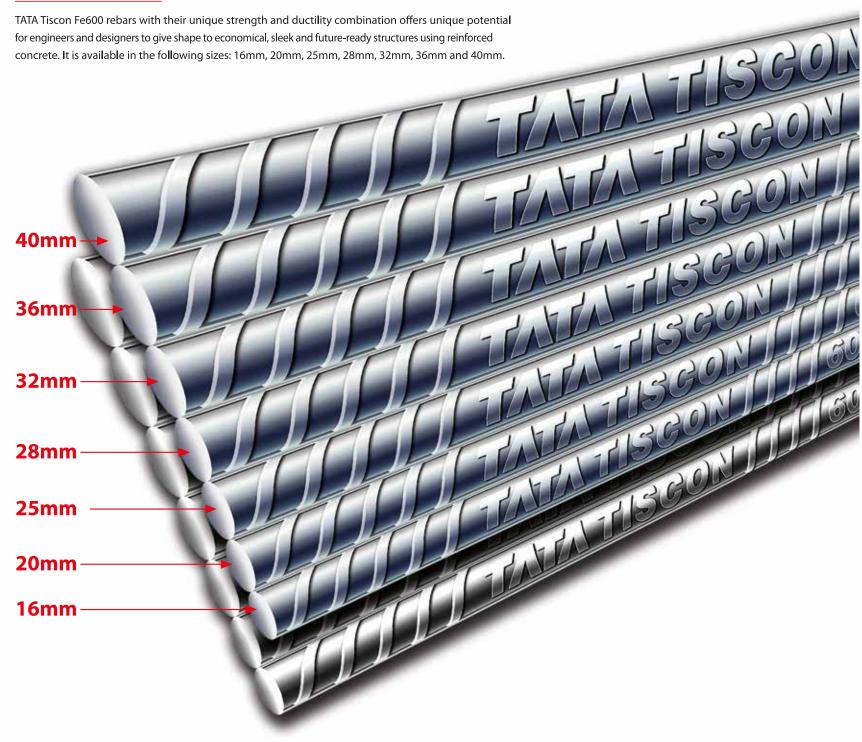

TATA TISCON Fe600 – MORE BENEFITS THAN ONE

TATA Tiscon Fe600 rebars offer 45% higher strength than conventional steel (415 MPa vs 600 MPa).

This results in:

• Reduction of steel consumption:

Redesigning the structure using Fe600 rebar, reduces the steel requirement for a project by up to 25%*

• Reduction in labour cost:

Less steel to handle and hence labour costs are lower by up to 15%*

• Reduction in congestion:

Higher strength requires lesser bars (section-area) to carry similar loads resulting in lesser congestion improving the quality of construction

Better ductility:

TATA Tiscon Fe600 rebars offer characteristic elongation of 16%* (min)

Faster progress:

Lesser steel handling and lower congestion enables faster project completion

Handling (cutting and bending):

Can be fabricated using conventional equipment

Industrial reliability:

More flexibility and efficiency in design

EXTRA STRENGTH. REDUCED STEEL USAGE. MORE SAVINGS



Normal rebar



TATA TISCON Fe600

* Varies from case to case

A CASE STUDY

Assuming the following parameters where:

Column dimensions = 1200 mm x 1200 mm

Axial load = 1000 Mt

Mx = 360Mt - m

My = 360Mt - m

Grade of concrete = M40

Unsupported length in a framed structure = 3.3m **Same parameter but using grade of steel** =

Fe415, Fe500D, Fe550, Fe600

RESULT

STRONGER REBARS



LESSER STEEL USAGE



HIGHER FLOOR SPACE INDEX



HIGHER SAVINGS

SUPER STRENGTH WITH SUPER SAVINGS



Fe600 rebars are much stronger than other rebars. Because of this strength, there is no need for extra steel to reinforce the structure. There is also a gain in Floor Space Index due to the amount of material saved. These savings also translate into a monetary gain of almost 20%* during construction.

WITH 45% HIGHER

STRENGTH THAN

CONVENTIONAL STEEL,

FE600 REBARS OFFER

UPTO 20% SAVINGS*.



* Varies from case to case


A Case Study

APPLICATIONS

TATA Tiscon Fe600 rebars, with the dual advantage of enhanced strength and superior ductility, can be used as reinforcement for commercial, housing, industrial, utilities, infra, MRTS and other reinforced concrete applications, including:

- Buildings
- Bridges



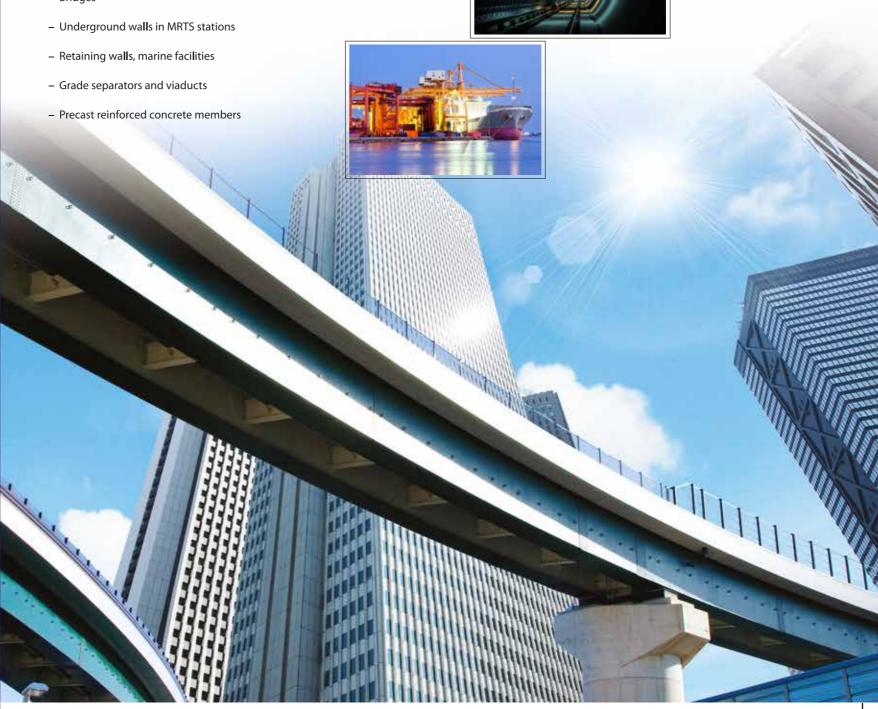

TATA TISCON EMERGES TO BE THE LEADING BRAND FROM TATA STEEL'S BRAND-WAGON

TATA TISCON comes from the family of long products of TATA Steel. It covers a variety of rebars ranging from Fe500D, Tiscon CRSD, Tiscon Super Ductile and Tiscon Readybuild which are produced for different geographies and for different customer needs.



THE NEW BENCHMARK OF PERFECTION

TATA TISCON Fe500D is manufactured as per the latest BIS 2008 standard which has the lowest level of sulphur and phosphorous in the rebar category. Made from virgin iron ore in the blast furnace, it goes through the following process:

Basic steel making >> Secondary refining >> Billets casting route.

This is carried out in state-of-the-art plants resulting in rebars with minimum impurities. This rebar is used in gauges varying from 6mm to 40 mm.

TATA TISCON CRSDis best suited for coastal areas and damp climates where corrosion occurs due to salinity, moisture or acid particles present in air. It increases the life span of structures by standing the test of time and the elements of nature.

This rebar is available in sizes ranging from 8mm to 40mm.

SUPER BRAND
WITH SUPER PROTECTION
AGAINST CORROSION

ENHANCED PROTECTION FROM EARTHQUAKES WITH PURE STEEL

TATA TISCON SUPER DUCTILE has been developed keeping the earthquake-prone zones in mind. Ordinary rebars are lesser ductile causing more damages in cases of tremors. Tiscon SD rebars, on the other hand, resists vibrations to a higher degree and minimises the harmful effects of quakes.

TAILOR-MADE SOLUTIONS FOR EVERY NEED

TISCON READYBUILD is the latest offering from the TATA Tiscon brandwagon. It is a service which offers customised rebars for hassle-free construction practises to the consumers. One can get both cut and bend rebars and couplers at the site.

A SERVICE INNOVATION

TATA STEEL SALES OFFICES (LONG PRODUCTS)

For further details contact

Tata Steel Limited

Tata Centre, 43 Jawaharlal Nehru Road, Kolkata 700 071 Tel: +91 33 6550 8186 / 76 • Fax: +91 33 2288 1640

e-mail: tatatiscon@tatasteel.com Toll free no.: 1800 345 8282

SALES OFFICES

<u> </u>						
NORTH ZONE	EAST ZONE	WEST ZONE	SOUTH ZONE			
NEW DELHI:	KOLKATA:	MUMBAI:	CHENNAI:			
1st Floor, Jeevan Tara Building	52 Chowringhee Road	3rd Floor	Chettinad "Sigapi Achi Building"			
5 Sansad Marg	Kolkata - 700 071	New India Assurance Building	18/3, Rukmini Lakshmipathy			
New Delhi - 110 001	Phone: 033 6550 8157/8166	87, M. G. Road, Fort	Road, Egmore			
Phone: 011 2334 2646/2648	Fax: 033 2282 1687	Mumbai - 400 001	Chennai - 600 008			
Fax: 011 2334 3196		Phone: 022 2267 5669/5945				
	BHUBANESHWAR:	Fax: 022 2261 9902	BENGALURU:			
CHANDIGARH:	2b-Fortune Tower,		2nd Floor, 'A' Wing			
SCO 16, 1st Floor	Chandrasekharpur	INDORE:	Jubilee Building			
Sector 26 C, Madhya Marg	Bhubaneswar - 751 023	3rd Floor, N.R.K.Business Park,	45 Museum Road			
Chandigarh - 160 019	Phone: 0674 6086404	B1 Scheme No. 54,	Bangalore - 560 025			
Phone: 0172 279 1047/0932		A.B. Road, Vijay Nagar	Phone: 080 2532 5517/18/19			
Fax: 0172 279 2426	JAMSHEDPUR:	Indore - 452 010, MP	Fax: 080 2532 5527			
	191 Burma Road	Phone: 0731 645 0690				
KANPUR:	Burma Mines		SECUNDERABAD:			
16/97 Navroz Building	Jamshedpur - 831 007	NAGPUR:	6th Floor, Surya Towers			
The Mall	Phone: 0657 227 0901/0995	Museum Road	104 Sardar Patel Road			
Kanpur - 208 001	Fax: 0657 227 0685	Civil Lines	Secunderabad - 500 003			
Phone: 0512 237 5679		Nagpur - 440 001	Phone: 040 5526 1050			
Fax: 0512 231 6631	GUWAHATI:	Phone: 0712 253 3209	Fax: 040 2781 2418			
	4th floor, Subham Velocity,	252 2209, 561 1812				
	Honuram Boro Path,	Fax: 0712 253 7078				
	Opp. Wallford, G.S. Road					
	Guwahati - 781 005	AHMEDABAD:				
	Phone: 09085988500	2nd Floor				
	DATMA	Premchand House Annexe				
	PATNA:	Ashram Road				
	Boring Canal Road	Ahmedabad - 380 009				
	Patna - 800 001	Phone: 079 6661 2605/				
	Phone: 0612 222 5624	2600/2603				
	Fax: 0612 223 2044	Fax: 079 6661 2604				
		PUNE:				
		Tata Steel Ltd,				
		Office No 6 & 7,				
			The state of the s			

2nd Floor, Wing-B, Great Eastern Plaza, Airport Road, Pune-411001

